


CVD4200

PLENUM S-VIDEO CABLE

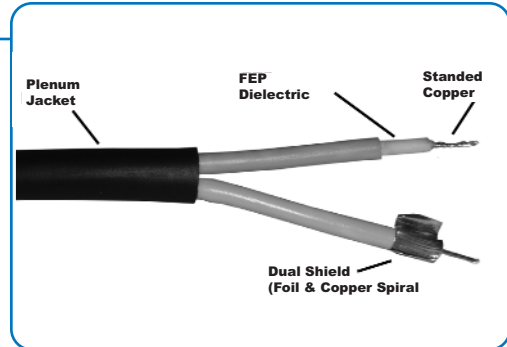

TECHNICAL SPECIFICATIONS

PRIMARY

- Coaxes 26 AWG (7/34), Tinned Copper, Stranded
- Dielectric Natural Foamed Fluorinated Ethylene Propylene, 0.072" Diameter
- Outer Shield Aluminum (In) / Polyester Tape, 25% Overlap
- Inner Shield 38 AWG Tinned Copper, 97% Coverage
- Jacket Polyvinyl Chloride, 0.009" Wall Thickness 0.102" +/- 0.003" Diameter

CONSTRUCTION

- Number of Coaxes 2
- Color Code 1. White 2. Yellow
- Outer Jacket Polyvinyl Chloride, 0.014" Wall Thickness
- Final Diameter 0.236"
- Color Dark Blue

Conductor Specifications	
Nominal attenuation	
Frequency (MHz)	Attenuation dB/100 ft. (30.48 m)
50	-3.60
100	-5.10
200	-7.40

ELECTRICAL CHARACTERISTICS

- Impedance 75 Ohms Nominal
- Capacitance 16 pF / ft. Nominal
- Time Delay 1.20 ns / ft. Nominal
- Velocity of Propagation 83%

UL LISTING

Type CMP as Specified in Article 800 of the National Electric Code.