

## New Product **PU-507RX-2H**

### 5-Play™ HDBaseT™ Receiver with dual HDMI outputs (inc. PoE & Single LAN, up to 100m)




5Play™ **HDBT**™ **HDMI**™  
HIGH-DEFINITION MULTIMEDIA INTERFACE

The PU-507RX-2H Receiver allows uncompressed HDMI signals and IP data to be received over a Single CAT5e/6/7 cable. This solution has the added features of RS-232 and 2-way IR control functionality over the same CAT5e/6/7 cable. These combined HDMI and control signals can be transmitted up to lengths of 100 metres. This variant of the popular PU-507-RX Receiver provides dual HDMI outputs for added flexibility enabling distribution to a second display within a zone as an alternative to using an additional Distribution Amplifier.

#### FEATURES

- Supports all v1.4 HDMI resolutions plus 4k.
- Supports Dual HDMI Outputs
- Supports uncompressed video/audio up to 10.2Gbps
- Common supported resolutions: HDTV: 480p, 576p, 720p, 1080i, 1080p, 1080p24, 4K; PC: VGA, SVGA, XGA, WXGA, SXGA, UXGA, WUXGA.
- HDMI, HDCP, & DVI compliant
- Supports HDCP repeating and CEC functions
- Uncompressed data transfer over single CAT cable (100m - CAT6/7; 80m - CAT5e)
- Uncompressed video 1080p, 60Hz, 48bits
- Audio support up to 7.1 CH & Dolby TrueHD, DTS-HD
- 5-Play™ convergence: HDMI, LAN, POE & Control (IR & RS232)
- Supports 3D signals

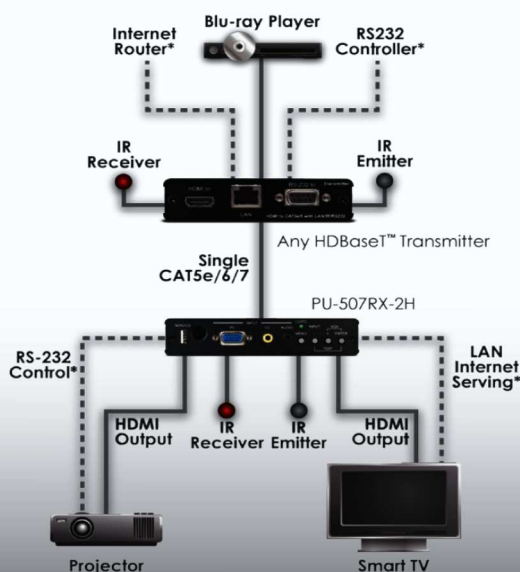

\*If available on transmitter

#### SPECIFICATIONS

Input:	1x RJ45 (1x HDBaseT HDMI & Propriety Data), 1x 3.5mm Stereo mini-jack (1x Infra Red Receiver)
Output:	2x HDMI (2x HDMI Uncompressed AV and Data), 1x 3.5mm Stereo mini-jack (1x RS-232), 1x 3.5mm Stereo mini-jack (1x Infra Red Emitter), 1x RJ45 (1x LAN Servicing)
Power:	24V/1.25A DC (US/EU standards, CE/FCC/UL certified)
Dimensions:	100mm (W) x 110mm (D) x 40mm (H)
Gross Weight:	520g
Net. Weight:	380g
Packaging:	Boxed

