




**RoHS Compliant**

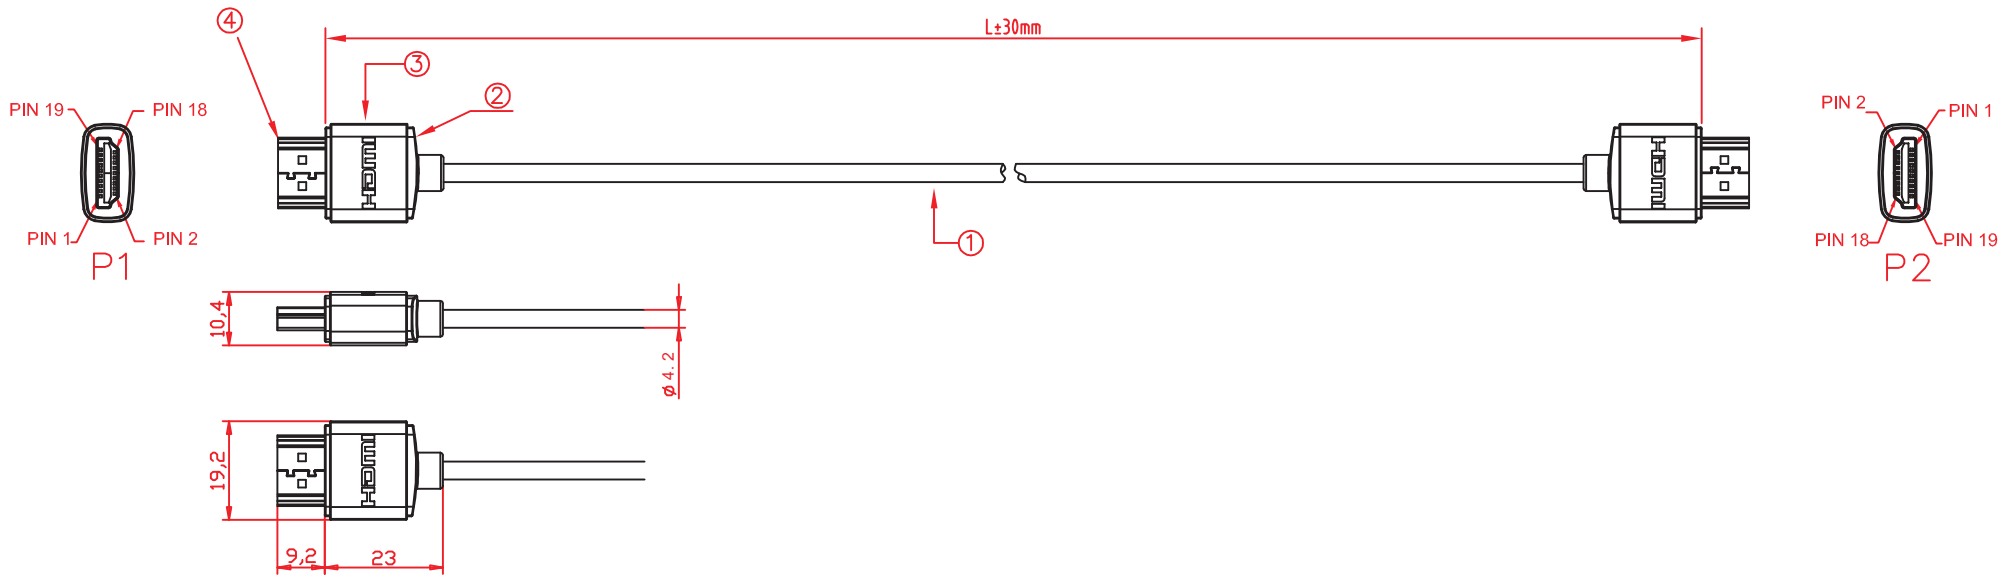

L(mm)	A(mm)
500	30
1000	30
1500	
2000	

ELECTRICAL CHARACTERISTICS:  
 Rated Temperature: 80°C Rated Voltage:30V  
 Voltage Withstand: AC 500V/1min,NO Breakdown  
 Insulation Resistance: Min. 100Mohms/cable at 20°C

**PIN Assignment**

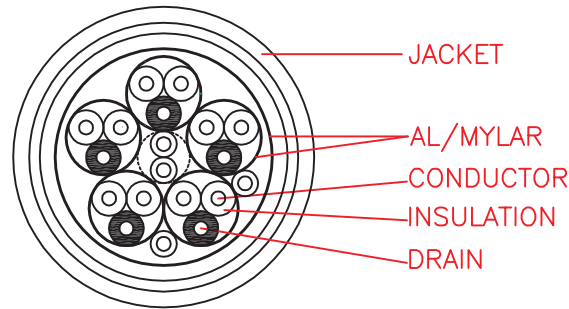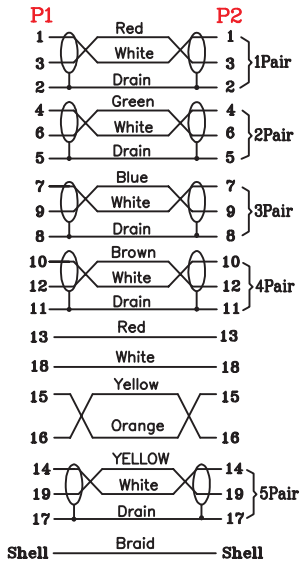

**CABLE SPECIFICATION:**

32AWG HDMI 2.0 (1/0.2BC\*1P+1/0.2BC)\*5C+1/0.2BC \*4C+1/0.2BC, OD:4.2mm, BK PVC

NO.	PART NAME	SPEC DESCRIPTION	REMAKE
6			
5			
4	CONNECTOR	19 PINS HDMI GOLD PLATED	
3	OVERMOLD	PE LOW DENSITY 45P	
2	OVERMOLD	PE LOW DENSITY 45P	
1	CABLE	32AWG HDMI 2.0 (1/0.2BC*1P+1/0.2BC)*5C+1/0.2BC *4C+1/0.2BC, OD:4.2mm, BK PVC	

INNERMOLD	TOLERANCE UNSPECIFIED ± ± ± ± ±		SCALE	UNIT
	ANGLE ±		NON	mm
OVERMOLD	DRAWN: zhang 2012/06/05	NAME	SHEET	
	DESIGNER:	HDMI A.A M.M	1/1	
	CHECKED: Kris	DRAWING NO.	180-180	REV
	APPROVED: Dived			0.1