


Datasheet for APPC-Series

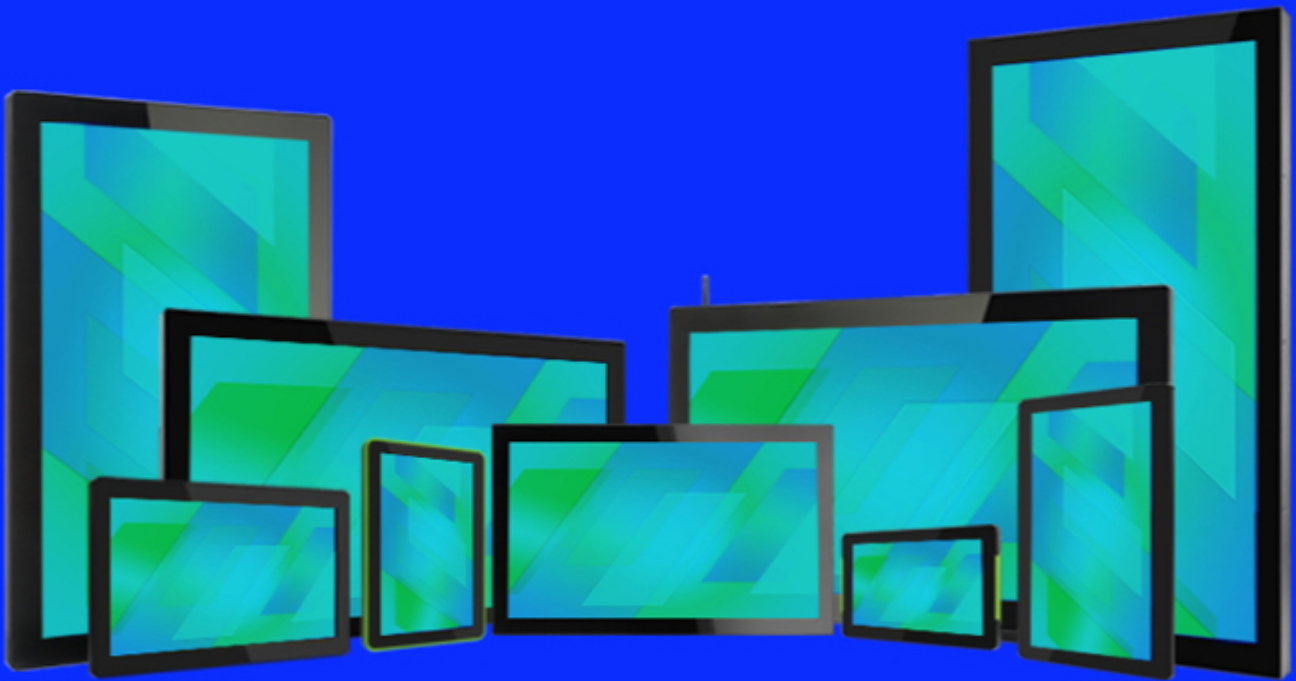

PRO DVX | ALWAYS

ProDVX Europe B.V.

Europalaan 10
5232 BC, Den Bosch
The Netherlands

+31 (0)73 737 0345
sales@prodvx.com

Android Panel PCs

APPC-15XP-R23

Panel

| | |
|-----------------------|-------------------------------------|
| Size | 15.6" |
| Resolution | 1920 x 1080 |
| Brightness | 300 cd/m2 |
| Viewing Angle | H 170° / V 170° |
| Touch Type | 10 point touch projected capacitive |
| Contrast Ratio | 800 : 1 |
| Aspect Ratio | 16:9 wide |

Physical

| | |
|-------------------------------|-------------------------|
| Housing | Plastic |
| Color | Black |
| Weight | 1300 g |
| Dimensions | 388 x 241 x 28 mm |
| Mounting / VESA | VESA 100 |
| Power Supply | 12 V / 2 A (EU, UK, US) |
| Power Supply included? | No |
| Power Usage | 10 ~ 20 Watt |

System

| | |
|-----------------------------------|--|
| CPU | RK3399 (Dual Core Cortex A72 with Quad Core A53) |
| GPU | MALI T860MP4 / 3D Graphic Engine (4K) |
| System Memory | 4GB LPDDR4 SDRAM |
| Internal Storage | 16GB eMMC |
| OS | Android 11 |
| Network LAN RJ45 | 10/100/1000 Mbps LAN |
| Power over Ethernet (PoE) | IEEE 802.3at (PoE+) |
| WiFi | 802.11 a/b/g/n/ac |
| Bluetooth | BT 4.2 |
| Storage / Working Humidity | 10 ~ 90% non-condensing |
| Storage Temp | -10 ~ 55 degrees C |
| Working Temp | 0 ~ 40 degrees C |

Other

| | |
|---------------------------------|--|
| I/O Ports | 12 V DC-IN, mini-hdmi-out, USB-C, 3.5 mm audio-out, S/PDIF, USB 3.0, Ethernet (RJ45), 2x COM (RJ45), 3x Pogo pin, GPIO, 4x USB 2.0 |
| Camera | Optional accessory |
| Microphone | YES |
| Audio Jack Output 3.5 mm | YES |
| Speakers | 2 x 3 W |
| Integrated NFC | Optional accessory |
| Standard Warranty | 3 years |

